

Metal painted cubicle for cathodic protection unit

GENERALS


Suitable for internal use, these cubicles are used for the housing of cathodic protection units and accessories for field measurements.

The cubicles are in conformity to EN 62208 standard, have IP65 protection degree against the entrance of water and solid bodies, RAL7032 gray-painted metallic surfaces (other colors are available under request), hinged door without any window. They are suitable to be installed onto the floor with lateral and rear access; the position of internal plates and components can be adjusted.

The basement is provided of openings that permits to route cablings from the bottom, the "shoe" is 100 tall and includes 4 flanged metallic corners. The cubicle can be moved using a fork lift.

Moreover, it has grounding pins (M6 threaded), lock with ergonomic handle and removable roof. It is provided of internal shelves to accommodate devices and it is prepared to accept standard type terminal blocks.

Under request special executions are available.

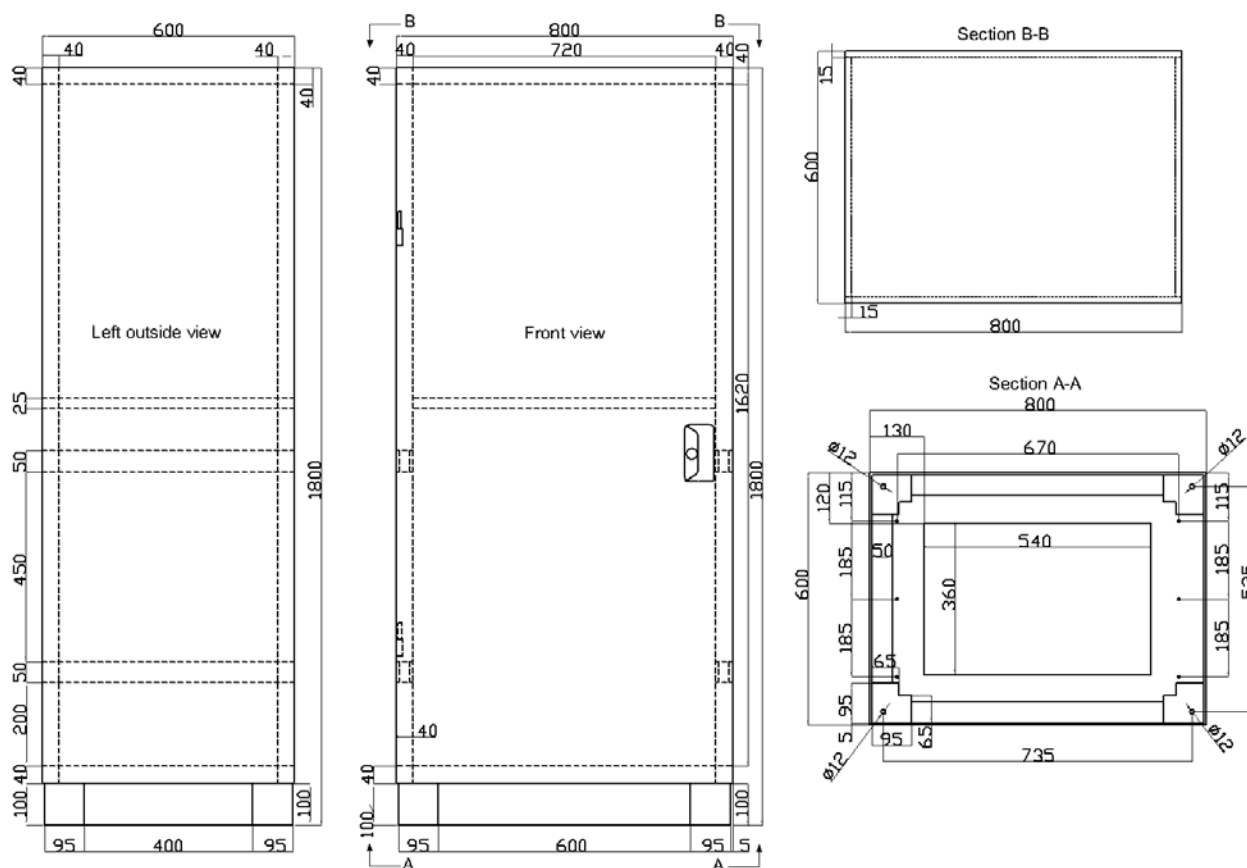

DIMENSIONS			
PART n°	L	H	P
P-8853-015	800	1800	600