

END-pipe seal ESPANSIT - Type Z

MOD. 13300

DN INT. PIPE 50-900 mm
DN EXT. PIPE 100-1050 mm

Bellows end seals for sealing the gap between the main pipe and the jacket pipe at the ends of crossing.

CHARACTERISTICS

- 10% tolerance on the outer diameter of the casing pipe and carrier pipe.
- Line obtained by moulding, the several waves allow high adaptability even for eccentric applications.
- Can be used only on new pipelines.
- Simple fastening with metal straps (included).

MATERIALS

Rubber EPDM:

Hardness 50 ± 5 Shore A (UNI 4916)

Colour:

Black

Tensile strength:


~11,6 MPa (UNI 6065)

Elongation:

~ 640 % (UNI 6065)


Straps:

Stainless steel

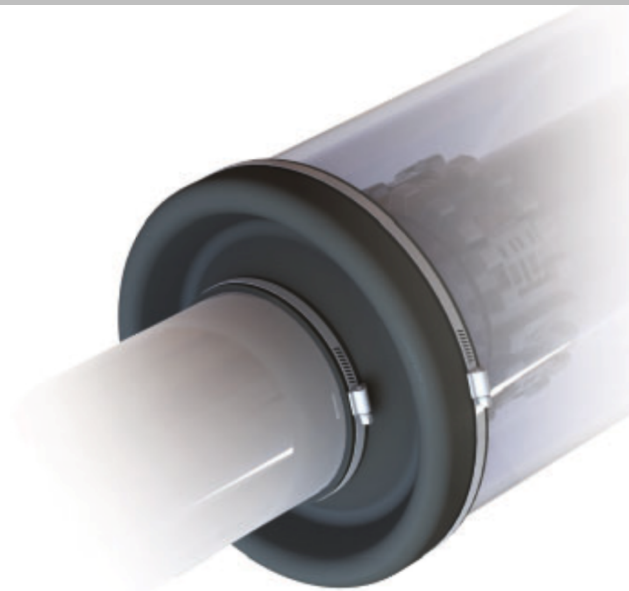


MAIN PIPE DN (mm)	CASING DN (mm)
from 50 to 900	from 100 to 1050


HOW TO APPLY THE TYPE Z ESPANSIT END SEAL




1. Insert the end seal on the main pipe before inserting the casing pipe or otherwise the final connection of the pipeline.



2. Insert the end seal on the jacket pipe.



3. Secure both pipes with the supplied straps.

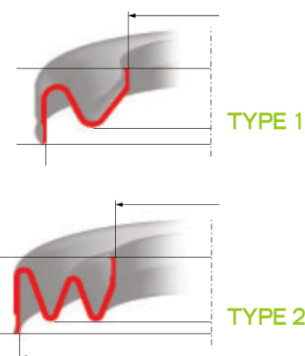

Available with 1 or 2 waves.

Telemagnetica S.r.l.

Via Teocrito, 36 - 20128 Milano

Tel. 02.255.29.00 - Fax 02.255.30.97

info@telemagnetica.com – www.telemagnetica.com